

R20



Ordering method

R20			TSX				
Model	Cable entry location No entry: Standard (S) B: From the side	Cable length ^{Note 1} 3L: 3.5m 5L: 5m 10L: 10m 3K/5K/10K (Flexible cable)	Positioner ^{Note 2} TS-X	Driver: Power-supply voltage / Power capacity 1I0: 100V/200W or less 2I0: 200V/200W or less	LCD monitor No entry: None L: With LCD	I/O selection NP: NPN PN: PNP CC: CC-Link DN: DeviceNet™ EP: EtherNet/IP™ GW: No I/O board ^{Note 3}	Battery B: With battery (Absolute) N: None (Incremental)
			SR1-X	10			
			Controller	Driver: Power capacity 10: 200W or less	Usable for CE No entry: Standard E: CE marking	I/O selection N: NPN P: PNP CC: CC-Link DN: DeviceNet™ PB: PROFIBUS	Battery B: With battery (Absolute) N: None (Incremental)
			RDV-X	2	10	RBR1	
			Driver	Power-supply voltage 2: AC200V	Driver: Power capacity 10: 200W or less	Regenerative unit	


Note 1. The robot cable is standard cable (3L/5L/10L), but can be changed to flexible cable. See P.510 for details on robot cable.
 Note 2. See P.446 for DIN rail mounting bracket.
 Note 3. Select this selection when using the gateway function. For details, see P.439.

Specifications

AC servo motor output (W)	200
Repeatability (°)	+/-0.0083
Maximum speed (°/sec)	360
Maximum allowable moment inertia (kgm²[kgfcm²])	1.83 [18.7]
Rated torque (Nm[kgfm])	21.46 [2.19]
Speed reduction ratio	1/50
Rotation range (°)	360
Cable length (m)	Standard: 3.5 / Option: 5.10
Speed reducer type	Harmonic drive
Position detector	-
Resolution (Pulse/rotation)	16384

Maximum allowable moment inertia

Payload parameters W (kg)	1	2	3	4	5	6	7	8	9	10
Maximum allowable moment inertia J (kgfcm²)	0.93	1.8	2.8	3.7	4.6	5.6	6.5	7.4	8.4	9.3
Payload parameters W (kg)	11	12	13	14	15	16	17	18	19	20
Maximum allowable moment inertia J (kgfcm²)	10.2	11.2	12.1	13.1	14	14.9	15.9	16.8	17.7	18.7




Note. When the weight of a tool or workpiece attached to the shaft R20 is W (kg), its moment of inertia (J) must be smaller than the values shown in the table above. (For example, enter 4kg if W is 3kg and J is 3.7kgf cm sec².) Enter the above mass parameter value for the controller, and optimum acceleration is automatically set based on this value.

Note. For calculation (equation) of the inertia moment, please refer to P.527.

Controller

Controller	Operation method
SR1-X10 RCX221/222 RCX240/340	Programming / I/O point trace / Remote command / Operation using RS-232C communication
TS-X110	I/O point trace / Remote command
TS-X210	Remote command
RDV-X210-RBR1	Pulse train control

R20

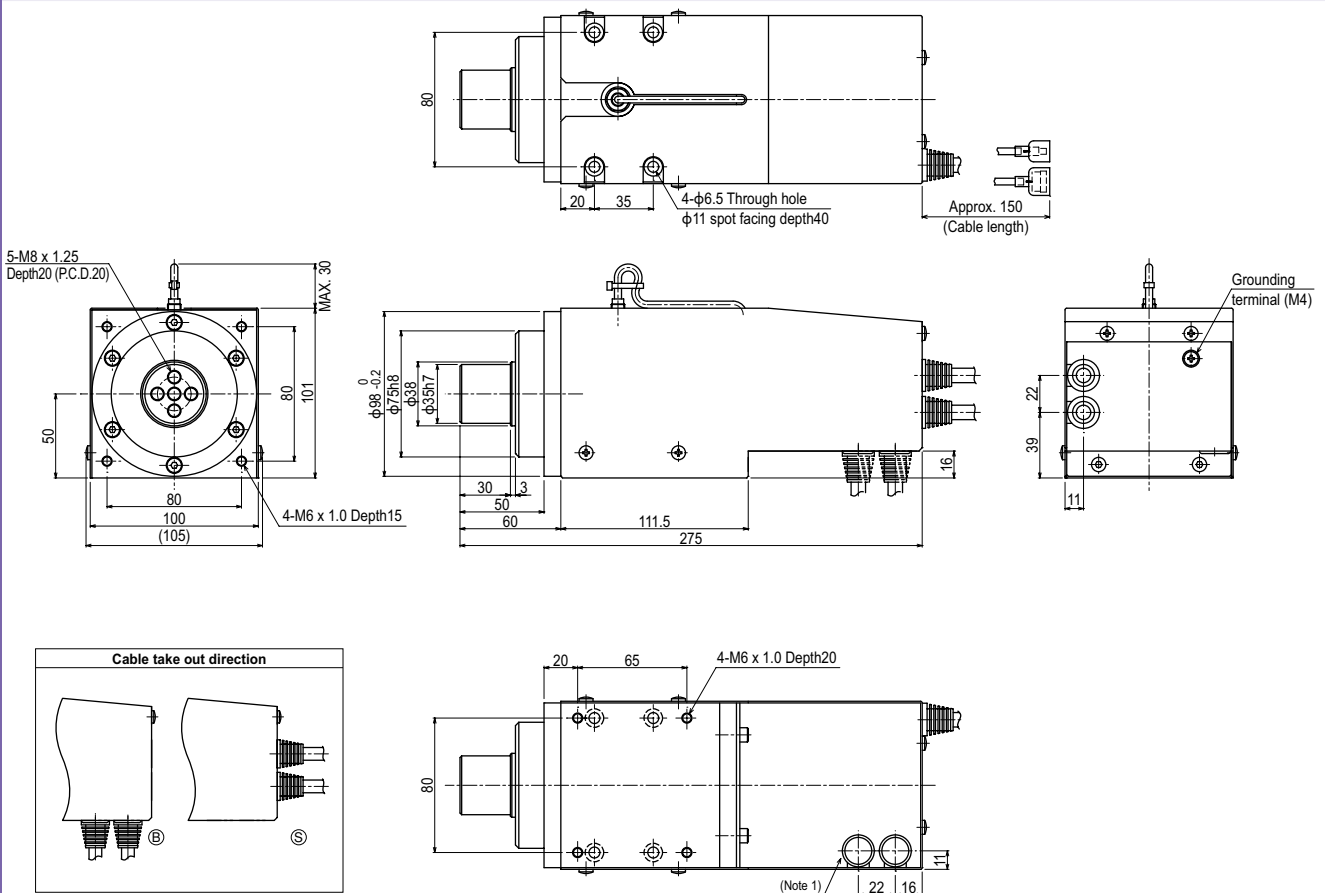

Weight (kg) 5.5

Note 1. The cable extraction port can be changed.